

Cloud IP camera quick start




Index

Camera Mounting.....	3
1. There's an App for that.....	4
2. Connect the camera.....	4
3. Wi-Fi setup mode.....	5
4. Connect phone to +Cam.....	6
5. Launch Seedonk App.....	7
6. Setup Wizard.....	8
7. Using Seedonk.....	16
7a.Seedonk Features-Main Window...17	
7b.Seedonk Features-Camera views...18	
8. Other way to view camera.....	19
8a. Webpage view.....	19
8b. PC client software.....	21
9. Safety information.....	22
10. Troubleshooting.....	23

Camera Mounting

To mount the +Cam to a wall, unscrew the base of the camera and remove the metal plate.

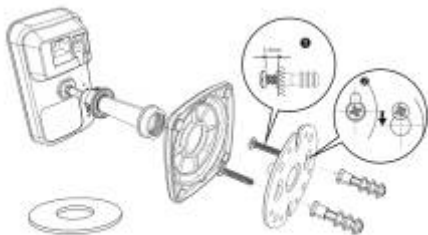

With the included screws and anchors, fasten the mounting bracket on to the wall. Then, reattached the base cover and screw the stand back on to the mounting bracket.

1. There's an App for That



To get started, download the Seedonk app from Apple's App store or Android Market.

2. Connect the Camera



Plug the +Cam in to AC power with the supplied adapter before continuing.

3. Wi-Fi Setup Mode



Please make sure the “Wi-Fi Setup” switch on the back of the camera is set to ON.

4. Connect Phone to +Cam



Go to Settings -> Wi-Fi on your iPhone or Android phone and connect to the +Cam wireless network.

5. Launch Seedonk App

Once your Phone establishes its connection to the +Cam, (usually takes around 30 seconds) launch the Seedonk App.



The Seedonk app will automatically detect your +Cam. When prompted, click 'Yes' to setup your camera.

6. Setup Wizard


Follow the instructions in the Camera Setup Wizard to complete installation.

Click “Continue” button

Click “Connect camera to Internet”



Choose a Wi-Fi Network

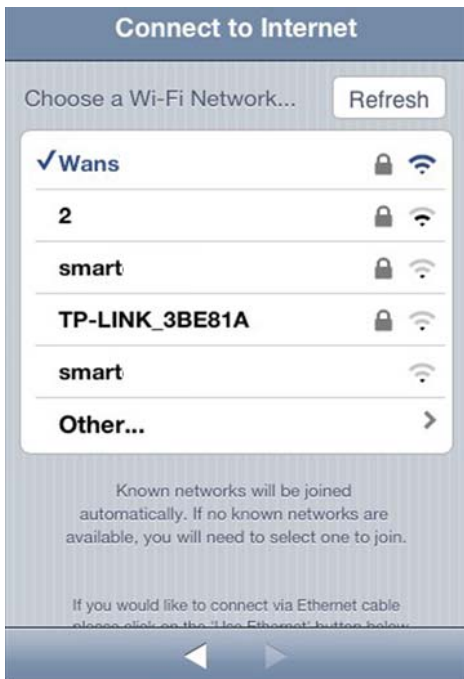

Please enter the Network Password and then Continue.



If you don't have Seedonk account, please create a new account, or use your existing

account. After finish all the information, click Continue

Connect to Server

Create your Account

Username test

Password ●●●●●●

Confirm ●●●●●●

Email 455913844@qq.com

If you already have an existing account, please click on the 'Use Existing' button below.

Use Existing **Continue**

Enter your account Username and Password then Sign in

Connect to Server

Enter your Account

Username test

Password ●●●●●●

Sign in



You can set the camera information here

Camera Information



Camera Name 601test

Description test

Continue

Please set the “WIFI Setup” switch to OFF to finish setting.

Setup Complete

For your safety, please set the "WiFi Setup" switch to OFF

Warning: your +Cam will not initialize until this is done!




Congratulations! You have completed the setup of your +Cam. Please reconnect your iPhone to the internet. You can now use the Seedonk App to access your +Cam.


Finish

7. Using Seedonk

Please enter your user name and password, created during the setup process, in the login window to access your +Cam.

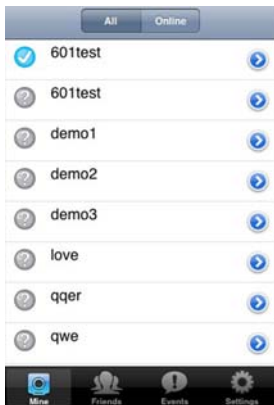

7a. Seedonk Features – Main Window

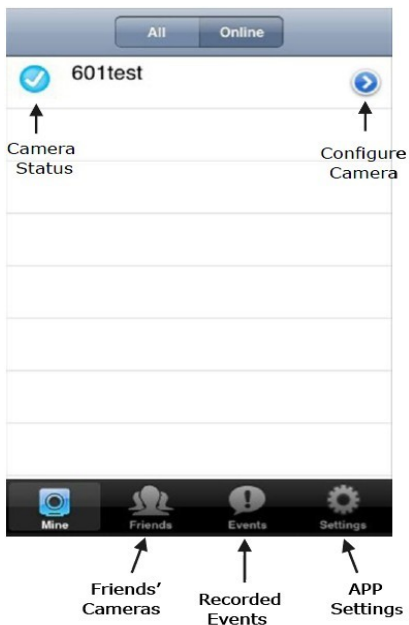

7b. Seedonk Features – Camera Viewer



↑
Take a
Snapshot

↑
Record
a Video

8. Other Way to View Camera

8a. Webpage View

Logo in www.seedonk.com and click
【LOGIN/SIGNUP】



Put your registered username and password then click Sign in.

Sign In

User Name

Password

- manage your account
- easy to use
- secure

You can view and set the camera here.

My Cameras Friends' Cameras Events Settings Sign Out

Online Show All

601 test

qwe

simple

demo1

demo3

demo2

Refresh List

Try Now! iSecurity+


Please use latest version of IE

Configure Status online

For first time use, you need to download plug-in or use your player.

8b. PC Client Software

User can go to www.seedonk.com to download IM software, after install, you can use like a Skype.

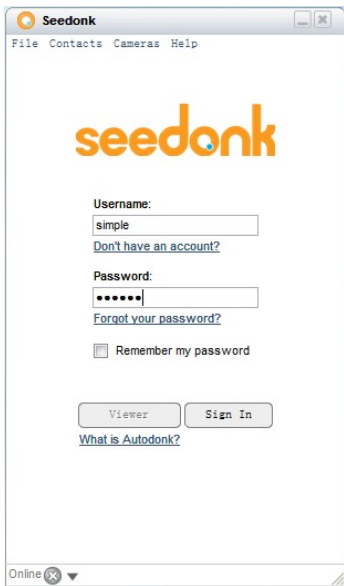

9. Safety Information

Do not point the camera directly at the sun; else it will damage the image sensor.

Keep the camera away from heat to avoid electric shocks.

Keep the camera away from rain or moisture.

Do not attempt to open, dismantle, repair, or service the camera. Doing so may cause electric shocks and other hazards.

Any evidence of misuse, abuse, or tampering will void the Limited Warranty.

To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. Use only the supplied antenna.

10. Troubleshooting



LED Status Indicators



Wi-Fi Setup

Green: Setup mode on

Orange: Setup mode initializing

Light Off: Setup mode off



Network

Green: Connected to Seedonk

Orange: Connected to local network

Flashing Orange: Not connected to any network



Power

Green: Power On