

DVR3204LF-S

32 Channel 2CIF 2U Standalone DVR For /3204LF-S



Features

- > 32 cameras with 1080 prealttime preview
- > H.264 dual -stream video compression
- > 2404/3204LF -S :Full channel @ 2CIF or every 4ch: 1ch D1 & 3ch CIF realtime recording
- > HDMI / VGA / TV / Spot simultaneous video output
- > All channel simultaneous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 8 SATA HDDs up to 32TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DVR3204 LF- S


Specifications

Model	DVR3204LF -S	
System		
Main Processor	Dual-core embedded processor	
Operating System	Embedded LINUX	
Video		
Input	32 channel, BNC	
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)	
Audio		
Input	16 channel, BNC	
Output	1 channel, BNC	
Two-way Talk	1 channel In put, 1 channel Output, BNC	
Display		
Interface	1 HDMI, 1 VGA, 1 TV, 1 Spot, BNC	
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split	1/4/8/9/16/25 /36	
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.264 / G.711	
Resolution	D1/4CIF(704×576/704×480) / HD1 (352×576/352×480) / 2CIF(704×288/704×240) / CIF(352×288/352×240) / QCIF(176×144/176×120)	
Record Rate	Main Stream:	HD1/2CIF/CIF(1~25/30fps), D1 (1~12/15fps),
	Extra Stream	CIF/QCIF(1~25/30fps)
Bit Rate	48~2048Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection & Alarm		
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input	16 channel	
Relay Output	6 channel	
Playback & Backup		
Sync Playback	1/4/8/9/16	
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search	

DVR3204LF-S

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device / eSATA Device / Internal SATA bu rner/ Network
Network	
Ethernet	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	8 SATA ports (8HDDs or 6HDDs+1CD/DVD -RW), up to 32TB
External HDD	1 eSATA po rt (Max 4 SATA HDD s), up to 1 6TB
Auxiliary Interface	
USB Interface	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC100~240V, 50/60 Hz
Power Consumption	40W (without HDD)
Working Environment	-10 ~+55 °C / 10~90%RH / 86~106kpa
Dimension(W×D×H)	2U, 440mm×460mm×89mm
Weight	6.5KG(without HDD)

System Connection

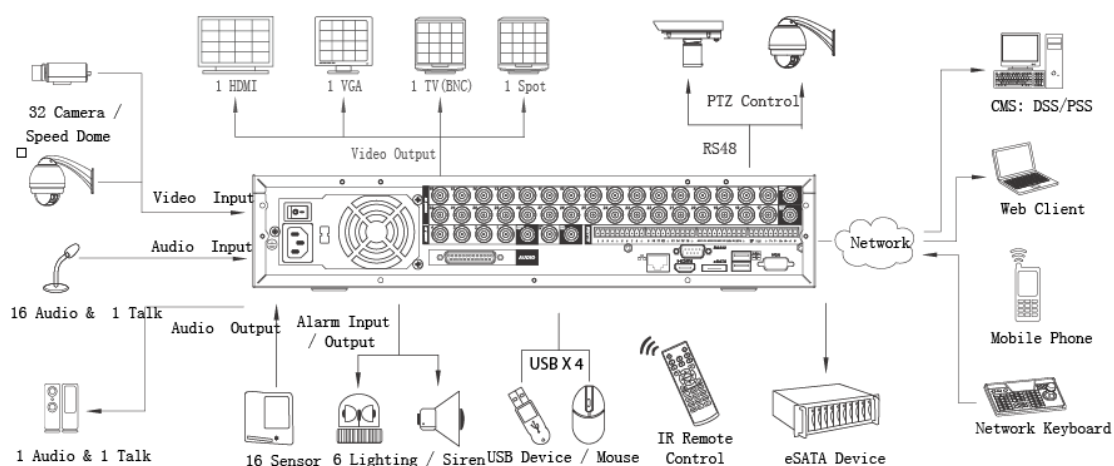

Here takes 3204LF-S as an example